




# HTC Desire Vibrator Replacement

Replacing a faulty Vibrator in your HTC Desire.

Written By: Lucas Tenney

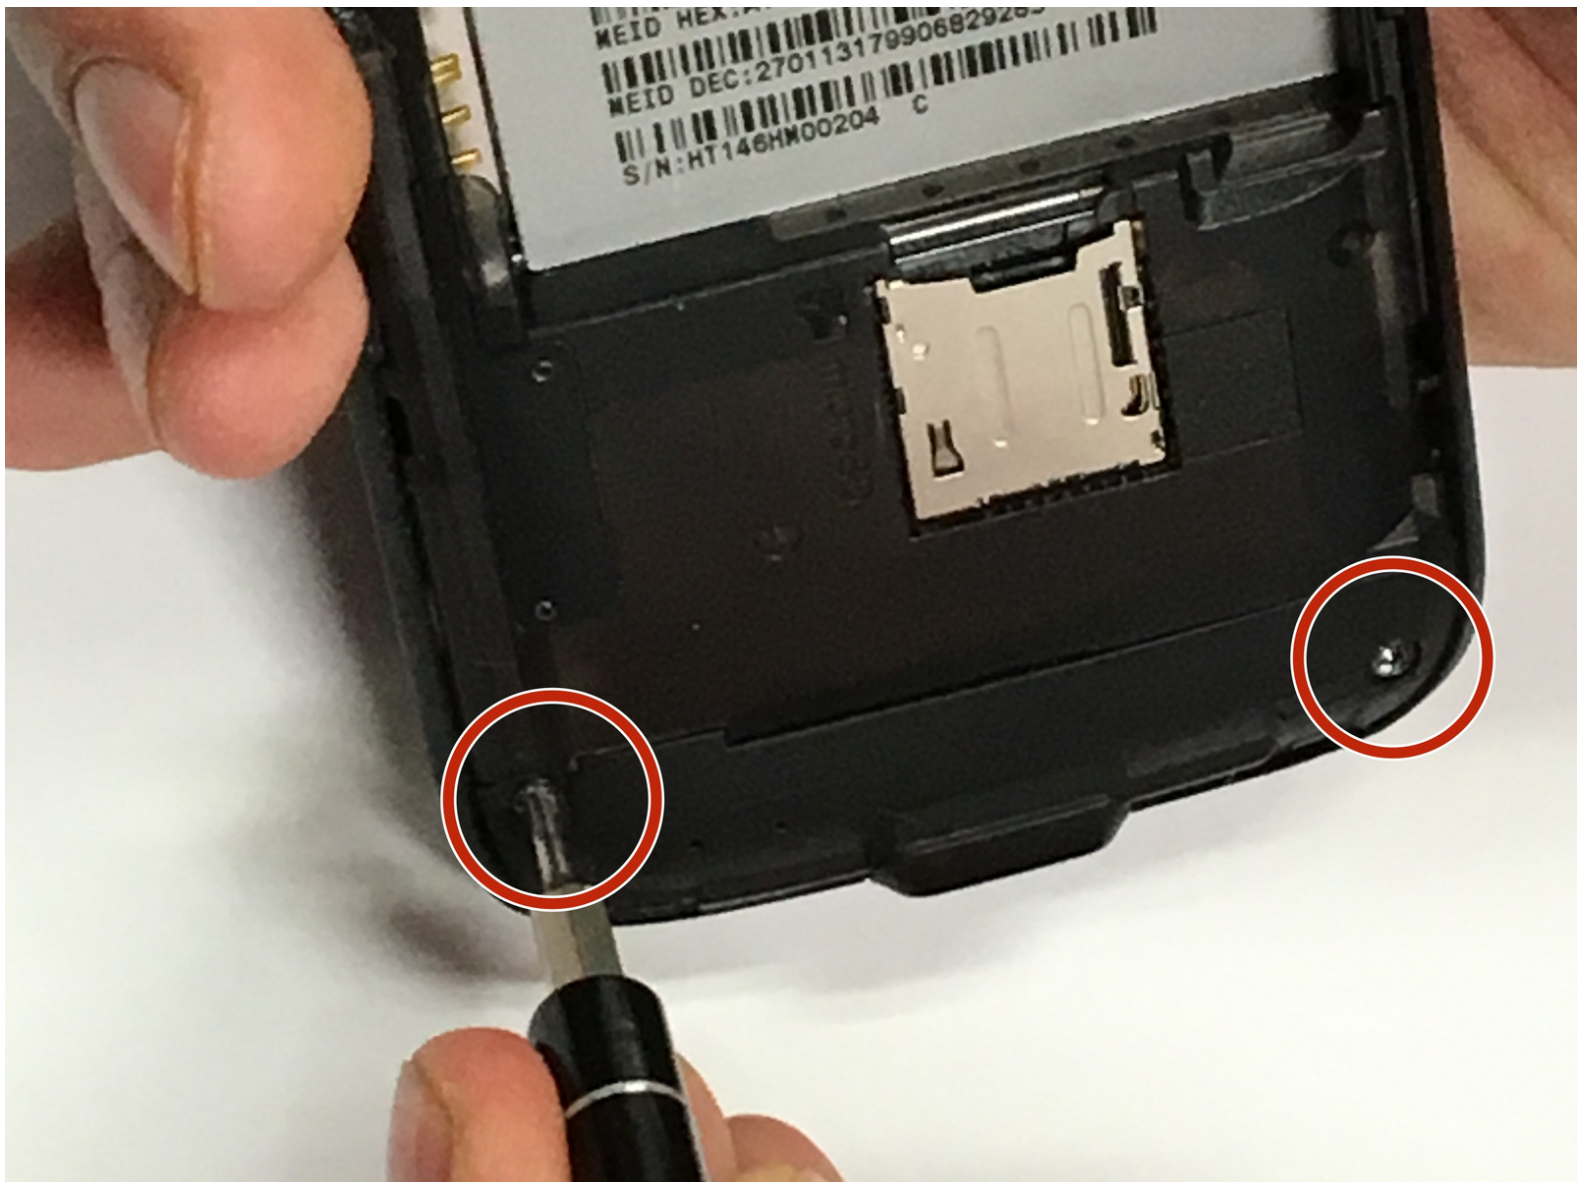

## INTRODUCTION

This guide will teach anyone how to replace a faulty vibrator in their HTC Desire.



### TOOLS:

- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)



### PARTS:

- [Replacement HTC Desire vibrator](#) (1)
-

## Step 1 — Battery



- Insert flat end of spudger into slot on the top of phone to pry off the back plate.


## Step 2



- Use flat edge of spudger to lift the bottom right corner of the battery.
- Lift the battery out of the phone.




## Step 3 — Vibrator

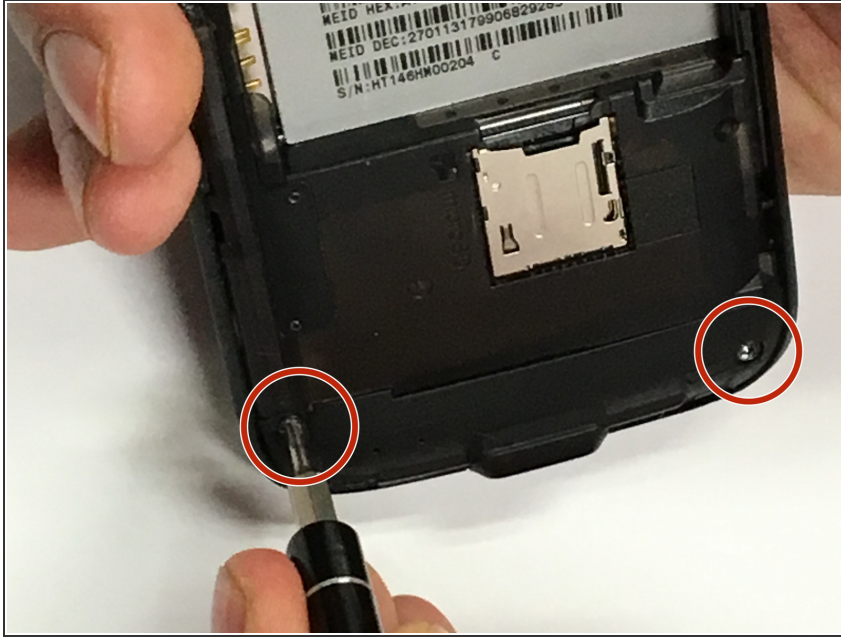



- Remove the lower, two 0.5 mm screws using Torx T5 screwdriver.

## Step 4

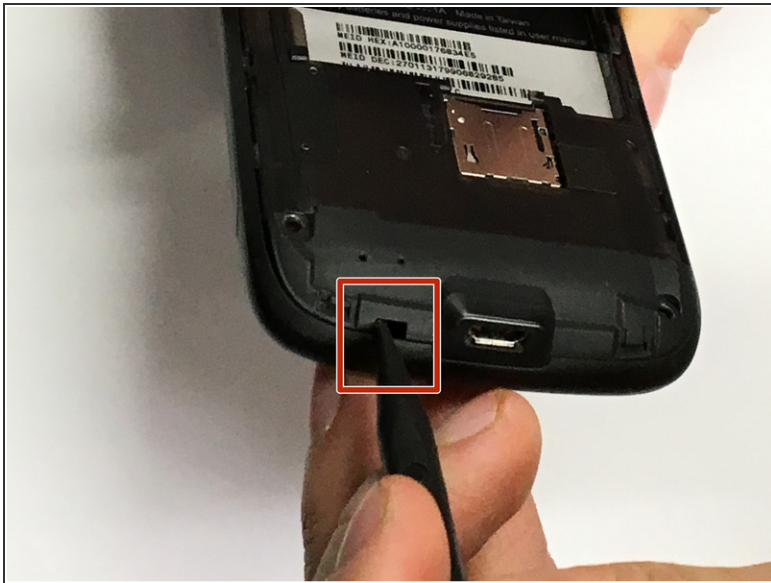

- Use spudger to pry vibrator panel off.

## Step 5

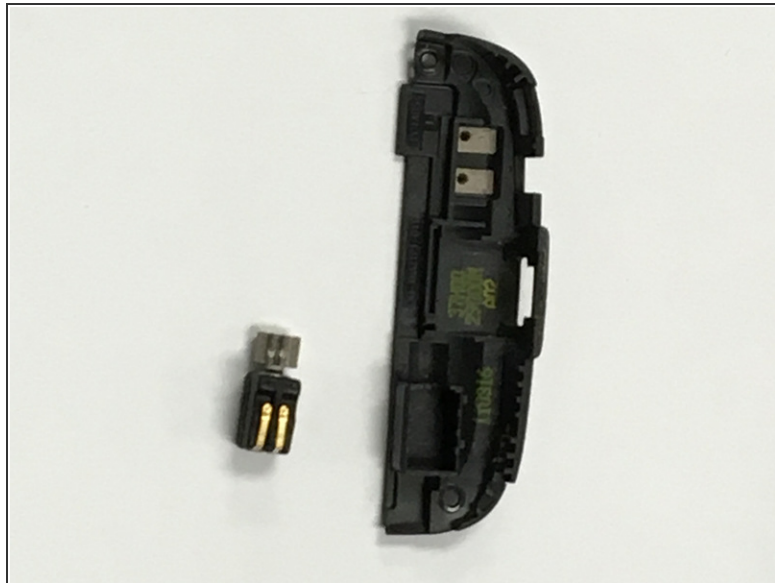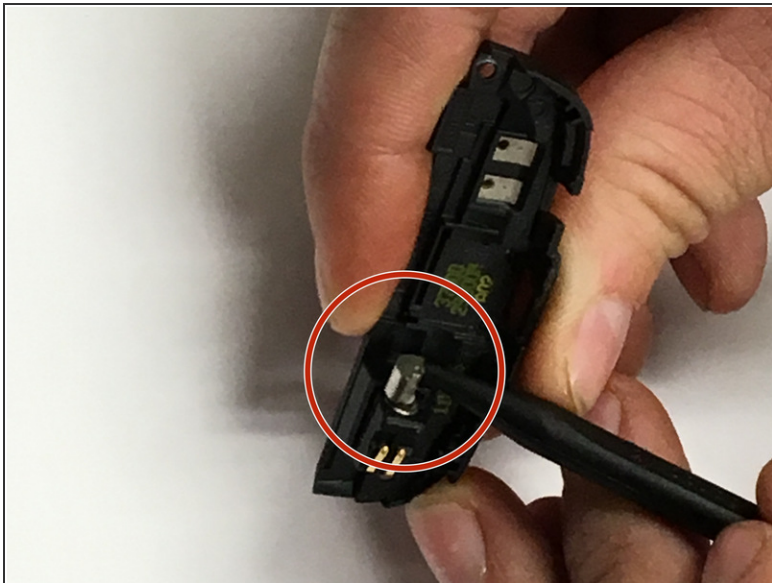

- Use spudger to remove the vibrator.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-22 10:58:52 AM.